

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 August 2003 (28.08.2003)

PCT

(10) International Publication Number
WO 03/070432 A2

(51) International Patent Classification⁷: B25H 1/00

(21) International Application Number: PCT/GB03/00715

(22) International Filing Date: 19 February 2003 (19.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0203788.5 19 February 2002 (19.02.2002) GB

GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: KENT, Frank, Michael, John [GB/FR]; 39, quai de la Roquette, F-13200 Arles (FR).


Published:

— without international search report and to be republished upon receipt of that report

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: VARIABLE GEOMETRY WORKTABLE

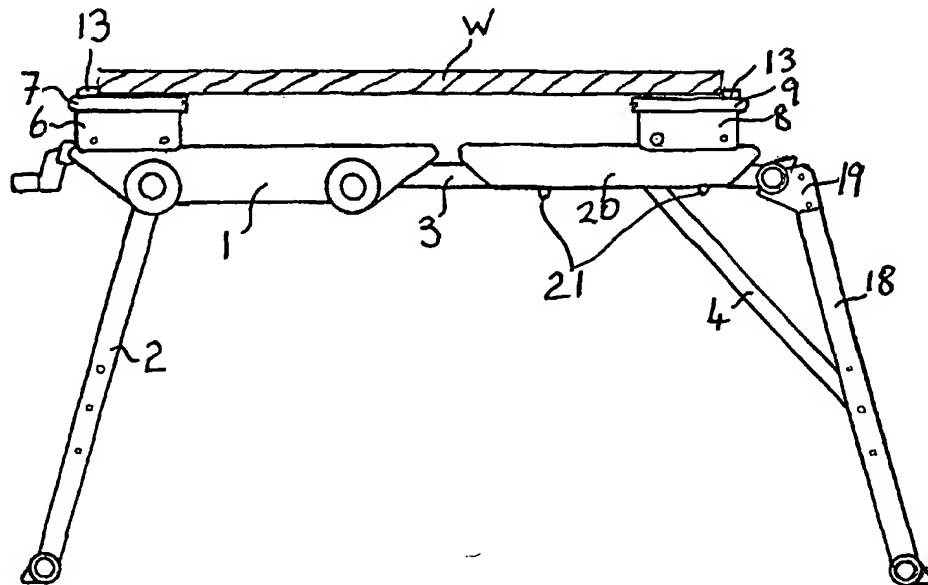

(57) Abstract: A worktable having a leg supports (2 & 3) linked by strut (4) in normal working mode may have its leg supports repositioned one with another for alternative working modes, here shown with leg support (3) providing an extension to the top frame support 1, an extension leg (18) connected by strut (4) supports leg support (3) in a horizontal plane and a sliding element (20) providing the same essential form features as the top frame support (1) permitting the operational footprint of jaws (7 & 9) to be extended over the elongated top frame support provided by leg support (3).